CONTEMPORARY SERIES



FIREPLACE FOR MEDIUM SPACES


Heat Output Cord Wood 85,000 BTU

33,000 BTU EPA Test Fuel


| Efficiency (LHV) | 72.6% |
|------------------|------------|
| Emissions | 3.47 gm/hr |
| Log Size (max) | 18 INCHES |
| FIREBOX SIZE | 2.5 cu.ft |
| Glass Size | 184 sq.in |
| Weight | TBE |
| | |

Heat medium spaces with the reduced footprint of a wall-mount fireplace. The FP25 offers exceptional wood heat performance with a large contemporary cast iron door and viewing area. Crafted with a floating firebox of heavy gauge steel, a high capacity baffle system, and EBT2 extended burn technology, this full-featured zero clearance fireplace is easy to load, easy to light, and will offer years of reliable heat for your home.

Homeowners can supplement their heat source with an optional Heat Distribution System with the FP25 Each heat duct is independently switch controlled, transferring heat into isolated rooms, and allowing for on demand control and comfort.





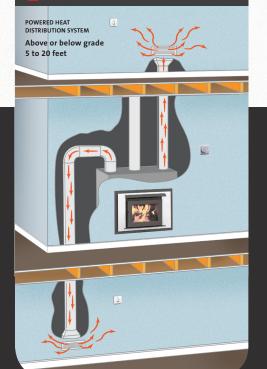



STANDARD FEATURES

Reliable, durable non-catalytic technology Air wash system for super clean ceramic glass Boost air for easy lighting Oversize glass viewing window Floating firebox for extended stove life 304 Stainless Steel Baffle, insulation cover, rails and flame shield High-tech multi-port combustion air injection system Extended Burn Technology (EBT2) Integrated heat exchanger East-West loading 2x80 cfm temperature actuated blowers Single-Lever Air Control Cast iron door Inside and outside combustion air capable Mobile Home Approved **EPA** Certified

PERFORMANCE OPTIONS

EPA Certified Powered Heat Distribution System

AIR WASH

BAFFLE SYSTEM

EPT2 EXTENDED BURN

FLOATING FIREBOX

HEAT DISTRIBUTION

KNIFE EDGE DOOR

SINGLE LEVER