

H3

H SERIES



A VERSATILE FIREPLACE
WITH A BIG FIRE.



Radiant
Gas Fireplaces



THE SCIENCE OF WARMTH™

Since 1890, we've been pioneering
and perfecting radiant heat
technology that generates
constant, comfortable warmth
within your home.

ON FRONT:

BIRCH
PLAIN BLACK LINER
CLEAN INSTALL BLACK (CIK)

Proudly Made
in North America



RADIANT HEAT

We put radiant warmth into every fire. In fact, the H3 produces 20% more radiant heat than the previous generation. You can feel it.

EFFICIENCY

Radiant heat and zone heating technology are up to 30% more efficient than central forced air systems.

ENHANCED FLAME

Our fires create realistic, soothing flames and ambient glowing embers that radiate heat.

V-CLASS BURNER

The high temperature precision stainless steel of our new V-Class burner creates a new level of radiant fire and aesthetics.

BIRCH LOGS

CONVECTIVE HEAT

Secondary heat exchanger naturally improve convective heat—without a fan.

ADJUSTABLE HEAT

Adjustable flame for constant, even warmth without having to cycle the fire on and off.

REALISTIC LOGS

High definition, low mass fiber ceramic logs heat up and glow quickly, radiating warmth.

CERAMIC GLASS

Durable and robust ceramic glass improves radiant performance.

ALUMINIZED STEEL

Lightweight, high temperature aluminized steel firebox and heat exchanger deliver efficient warmth.

SAFETY

Our fires are put through rigorous safety testing in our in-house CSA approved lab.

Please Note: Printed images may vary from actual product. All product information is accurate at time of printing and is subject to change. For more information, visit valorfireplaces.com/h3





DRIFTWOOD
CHARCOAL BRICK LINER
3" VINTAGE IRON FRONT
BACKING PLATE (1040BPB)
WITH H3 HEATSHIFT **NEW**

ZERO CLEARANCE (ZC)
Always a great addition to
your new home or major
renovation.



1 LOGS

We designed these expertly crafted logs as realistic-looking as possible, and engineered them to harness radiant heat from the flames and glowing embers.



BIRCH



BIRCH LOGS
REFLECTIVE LINER
CLEAN INSTALL KIT (CIK)



DRIFTWOOD




TRADITIONAL LOGS




2 LINERS

Choose a firebox liner to complement your front as well as your logs. We have three popular designs as well as four new looks.



BLACK FLUTED



PLAIN BLACK




REFLECTIVE GLASS


ZC REDUCED CLEARANCE
A great way to replace your
existing gas or wood fireplace
with a ZC fireplace.




BIRCH LOGS
HERRINGBONE LINER
CLEARVIEW VINTAGE IRON FRONT
BACKING PLATE (1035BPB-RC)



LEDGESTONE



CHARCOAL BRICK



RED BRICK



HERRINGBONE



3 FRONTS

Select from three stylish fronts, and a Clean Install option (right) that offers a 1" trim—no need for a front.

Your Valor dealer can help you choose the best backing plate for your installation. To see more examples, visit your local Valor dealer or valorfireplaces.com/h3

FRONT: 1" CLEAN INSTALL KIT BLACK





FRONT: CLEARVIEW VINTAGE IRON
BACKING PLATE: 1035BPB



FRONT: 3" 4-SIDED VINTAGE IRON
BACKING PLATE: 1040BPB



FRONT: 3" 4-SIDED BRUSHED CHAMPAGNE
BACKING PLATE: 1040BPB-RC





BIRCH
PLAIN BLACK LINER
CLEAN INSTALL BLACK (CIK)

FINISHES

Our H3 fronts feature three finishes: the versatile Vintage Iron and elegant Black, both powder-coated for longevity; or, our new finish, Champagne, a plated brushed brass. If available, ask your dealer to see an example in person.


PLATED BRUSHED
CHAMPAGNE



POWDER-COATED
VINTAGE IRON



POWDER-COATED
BLACK





TRADITIONAL LOGS
PLAIN BLACK LINER
3" BRUSHED CHAMPAGNE FRONT
BACKING PLATE (1035BPB)

REMOTE CONTROL

VALOR REMOTE—STANDARD

Your remote lets you select, adjust or program your desired temperature—the fire automatically adjusts to maintain the temperature of the room. Your remote even allows you to turn your pilot light on or off from the comfort of your sofa.



VALOR WALL SWITCH—STANDARD


Can't find your remote? Your wall switch allows you to do basic functions. Both the remote and the wall switch come standard with our H3 fireplace.

HeatShift keeps your valued art-work, a TV or construction materials cooler—ideal for wood cladding!

Find out more at
valorfireplaces.com/heatshift

3" VINTAGE IRON FRONT
BACKING PLATE (1040BPB)
WITH H3 HEATSHIFT **NEW**

NEW **HEAT**
SHIFT™

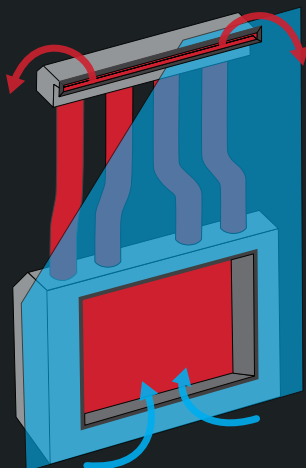

KEEPS WALL COOLER

Pioneered by Valor, our unique HeatShift System naturally circulates up to 125 cubic feet of convective heat per minute through hidden ducts and back into the room—avoiding surface areas above the fireplace.

DESIGN FLEXIBILITY

Run standard finishing materials right up to the fireplace surround, including drywall, wood, tile and stone.

Install mantels lower than usual at a one-to-one ratio of depth to height from the fireplace surround.





IMPROVES PERFORMANCE

Harnessing convective warmth, up to 60% of fireplace heat rises and flows through HeatShift and back into the room. The remaining radiant heat emanates from the fireplace, keeping you warm.




CONSTRUCTION MADE EASY

Unlike many competitor products, HeatShift is built and designed in North America for North American homes, meeting building code requirements.



NO ELECTRICITY REQUIRED

Heatshift circulates heat naturally using gravity and Valor product ingenuity—no need for a fan or electricity. No power—no problem. Valor fully ducts HeatShift for clean, safe air quality.

DIMENSIONS

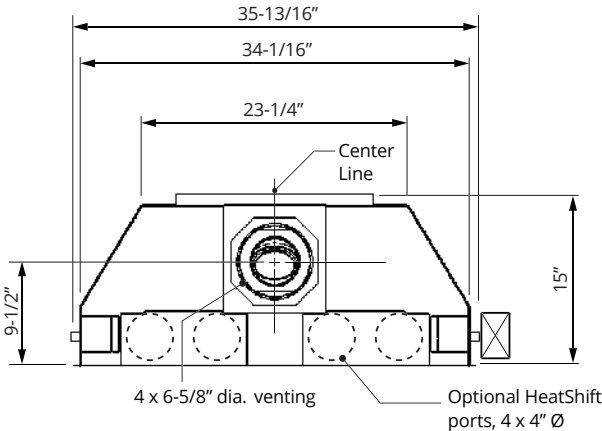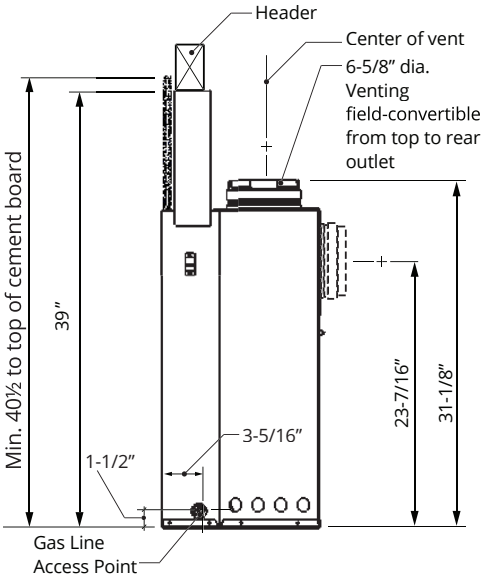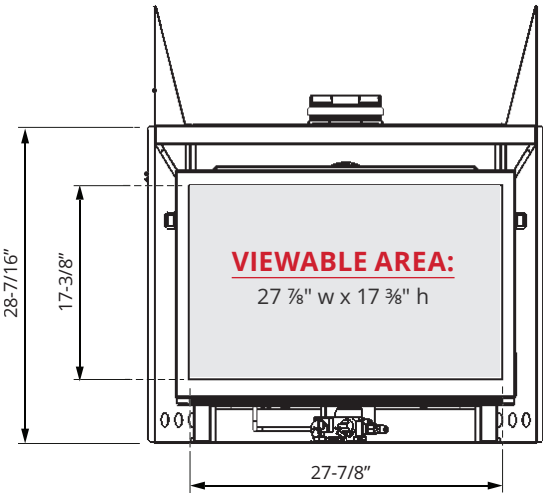

ALWAYS REFER TO THE
H3 MANUAL FOR COMPLETE
INSTALLATION INSTRUCTIONS.

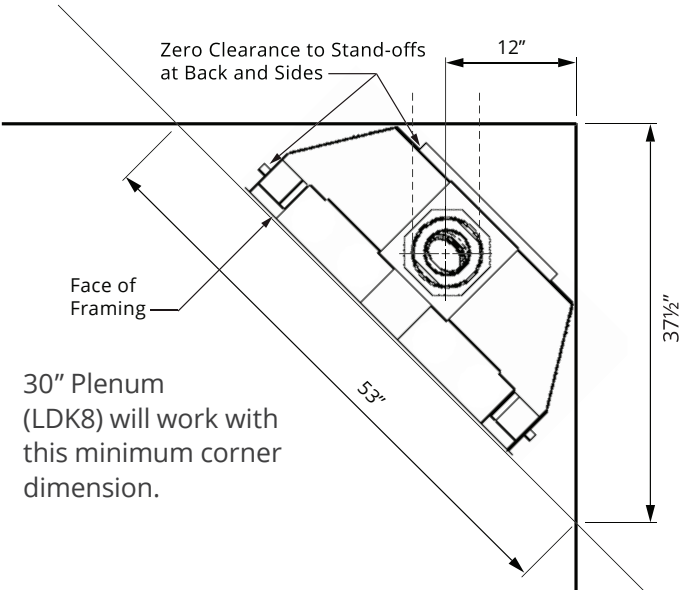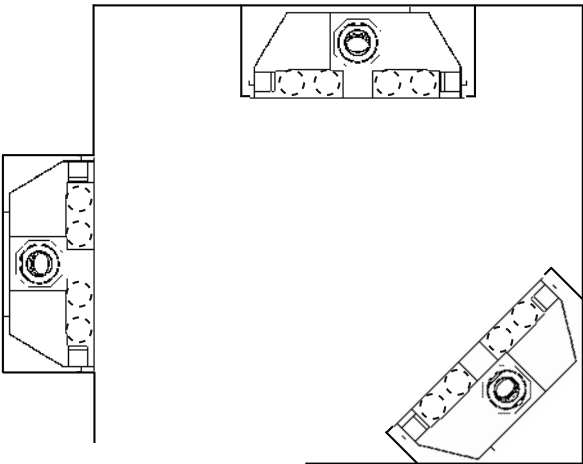


FRAMING AND VENTING

ZC

Between underside of header and base of heater.
Base of heater must be at finished hearth height.
However, please note that the 1040BPB 4-sided
backing plate extend 1/4" below the base of heater.
Increase cavity height accordingly.

1/2" thick non-combustible
board required above engine
(not supplied). See page

NOTE: This unit requires
a solid platform to support
it. Combustible framing
allowed beneath fireplace.

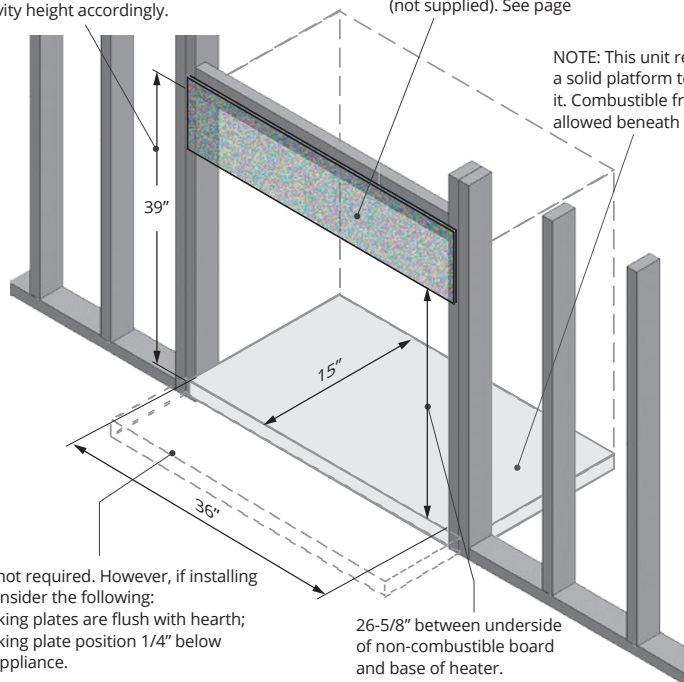


A hearth is not required. However, if installing
a hearth, consider the following:
3-sided backing plates are flush with hearth;
4-sided backing plate position 1/4" below
bottom of appliance.

26-5/8" between underside
of non-combustible board
and base of heater.

ALWAYS REFER TO THE
H3 MANUAL FOR COMPLETE
INSTALLATION INSTRUCTIONS.

COAXIAL AND COLINEAR VENTING


The maximum vertical vent
run on an H3 cannot exceed
40 feet in total length. The
engine can be either top or
rear vented.

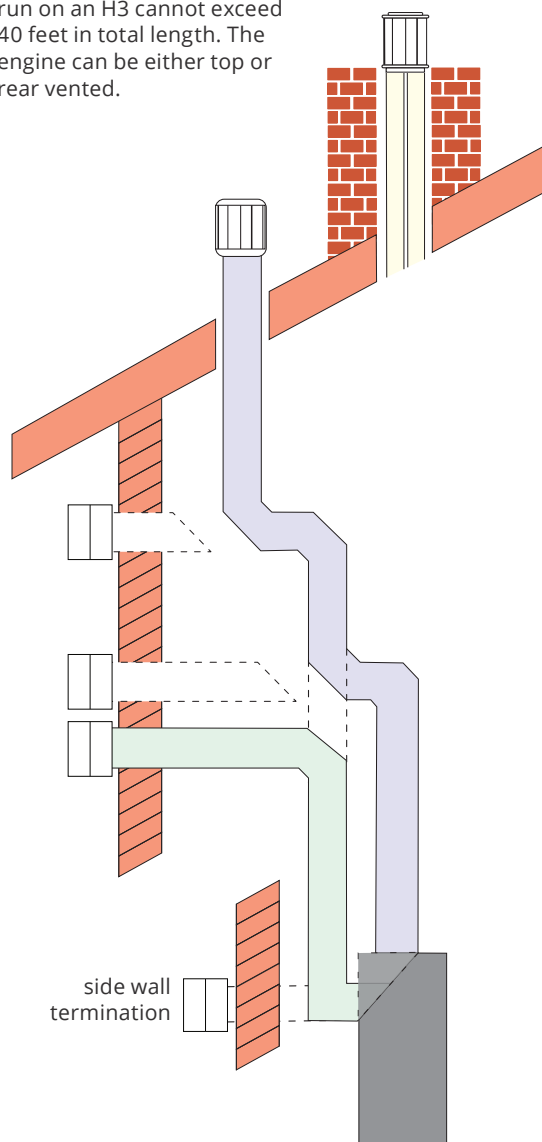

ZC REDUCED CLEARANCE

NOTE: This unit requires
a solid platform to support
it. Combustible framing
allowed beneath fireplace.

Between underside of header and base of heater.
Base of heater must be at finished hearth height.
However, please note that the 1040BPB-RC 4-sided
backing plate extend 7/8" below the base of heater.
Increase cavity height accordingly.

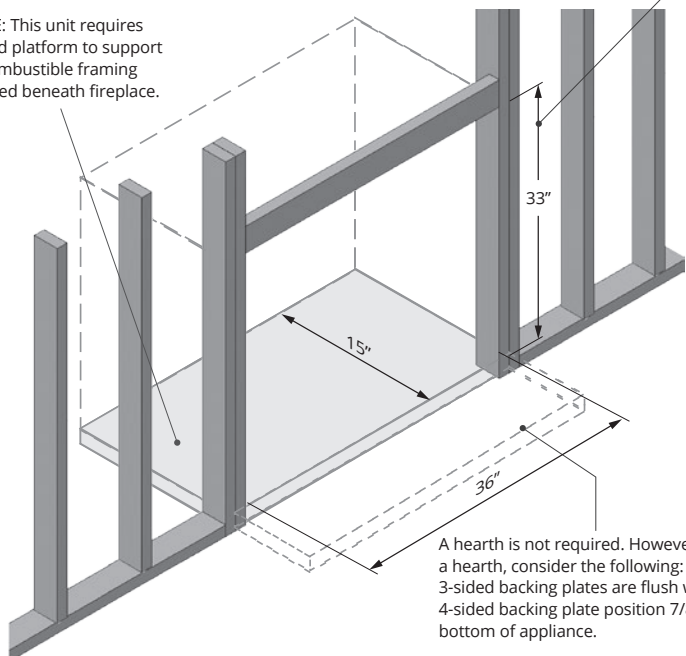


A hearth is not required. However, if installing
a hearth, consider the following:
3-sided backing plates are flush with hearth;
4-sided backing plate position 7/8" below
bottom of appliance.

BACKING PLATES

ZC HEATSHIFT COMPATIBLE



These standard Zero Clearance (ZC) backing plates are typically smaller and made for framing a new fireplace where non-combustible materials are required directly above the unit. The ZC backing plates are compatible with HeatShift.

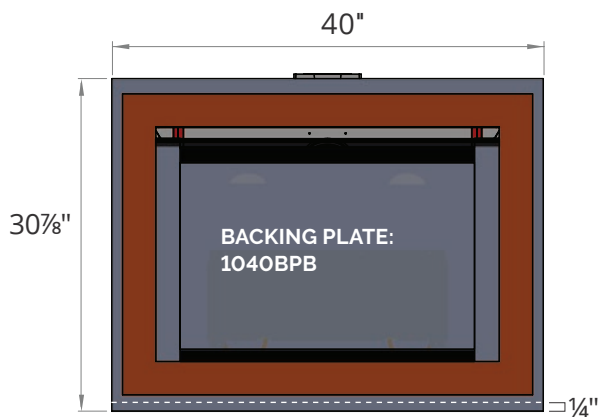



4-SIDED
Backing Plate
overhangs bottom
of appliance.

ZC REDUCED CLEARANCE

These larger ventilated reduced clearance (RC) backing plates allow tighter framing dimensions than standard ZC plates—ideal when replacing wood or gas fireplaces or preserving existing wall finishes or framing. The Reduced Clearance backing plates are not compatible with HeatShift.

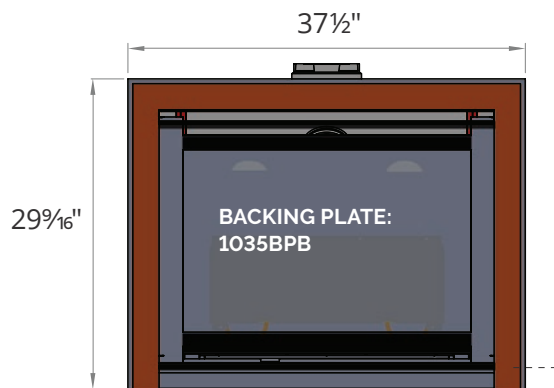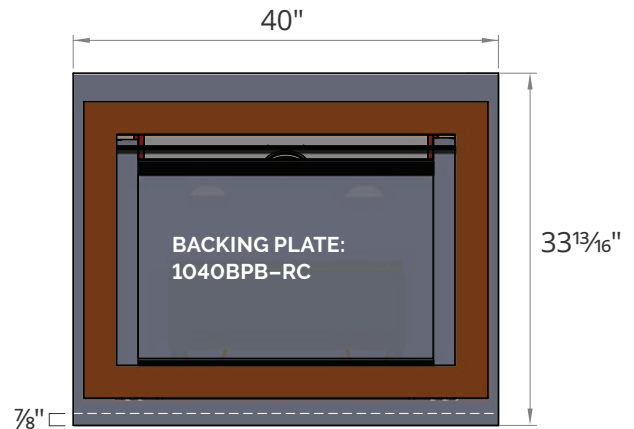

3-SIDED
Backing plate sits flush
with bottom of appliance.

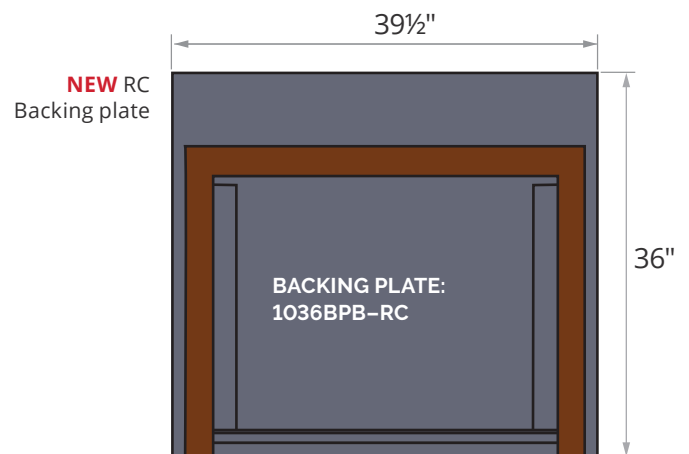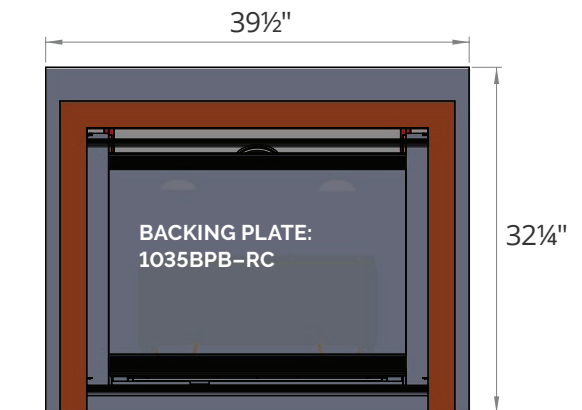

WARNING

This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Note: Natural gas, in its original state, contains Benzene.

OPTIONS

| GAS + EFFICIENCY | | MAX INPUT | MIN INPUT | MAX. OUTPUT* (W/O FAN) | ENERGUIDE %* |
|-------------------------|--------|------------------|------------------|-----------------------------------|---------------------|
| Natural Gas | 1000KN | 25,000 | 12,000 | 19,098 | 72.05 |
| Propane | 1000KP | 24,000 | 11,000 | 18,523 | 73.13 |

*EnerGuide Ratings and outputs have been determined without a fan/blower, using the CSA P4.1-15 test method (2015)

1 LOGS

| | |
|-------------|---------|
| Birch | 1000BLK |
| Driftwood | 1000DWK |
| Traditional | 1000LSK |

2 LINERS

| | |
|------------------|---------|
| Ledgestone Grey | 1015LSL |
| Herringbone | 1075HBL |
| Brick Charcoal | 1065CBL |
| Red Brick | 1010VRL |
| Black Fluted | 1025FBL |
| Plain Black | 1060PBL |
| Reflective Glass | 1070RGL |

About our efficiency ratings

While the North American fireplace industry is largely self-regulated, at Valor we use recognized Canadian and US government testing methods to determine our energy efficiencies, and ensure our products perform in your home as rated.

Visit valorfireplaces.com/efficiency for more information.

3 CHOOSE A FRONT:

| | | |
|--------------------------|---------|----------|
| Clean Install Kit, Black | 4-sided | 1030CIK |
| Clearview Vintage Iron | 3-sided | 1045CFV |
| 3" Brushed Champagne | 4-sided | 1041FSCB |
| 3" Vintage Iron | 4-sided | 1041FSV |

4 CHOOSE A BACKING PLATE:

| ZC | RC |
|---------|-------------------------------------|
| n/a | n/a |
| 1035BPB | 1035BPB-RC or 1036BPB-RC NEW |
| 1040BPB | 1040BPB-RC |

RC backing plates are not compatible with HeatShift.

H3 HEATSHIFT

This HeatShift is exclusive to the H3. No other HeatShift combination complies with the H3.

| | |
|-----------------------------------|-------|
| 30" plenum frame NEW | LDK10 |
| 30" plenum and collars NEW | LDK8 |
| Liners and clamps NEW | LDK11 |



STANDARD REMOTE

| | |
|----------------|---------|
| remote control | GV60 |
| wall switch | 1265WSK |

OPTIONAL

| | |
|------------------------|---------|
| Circulating fan | 1095CFK |
| Outdoor conversion kit | GV60CKO |
| Power adapter | GV60PAK |

Copyright Miles Industries Ltd. 2020
Designed and manufactured by Miles Industries Ltd.



Certified to ANSI Z21.88-2017/CSA 2.33 Vented Gas Fireplace Heater American National Standard. CGA-2.17-91 Gas Fired Appliances for use at High Altitudes.



TRADITIONAL LOGS
RED BRICK LINER
CLEARVIEW VINTAGE IRON FRONT
BACKING PLATE (1035BPB)